



$$\tilde{\Theta} = 0 \hat{=} \emptyset \quad \text{æB'}$$



↓

.....	4
.....	4
.....	4
.....	6
.....	6
.....	7
.....	8
.....	20


0 6 1 1 1 0



0




RSFE


W#6

66P.BØN

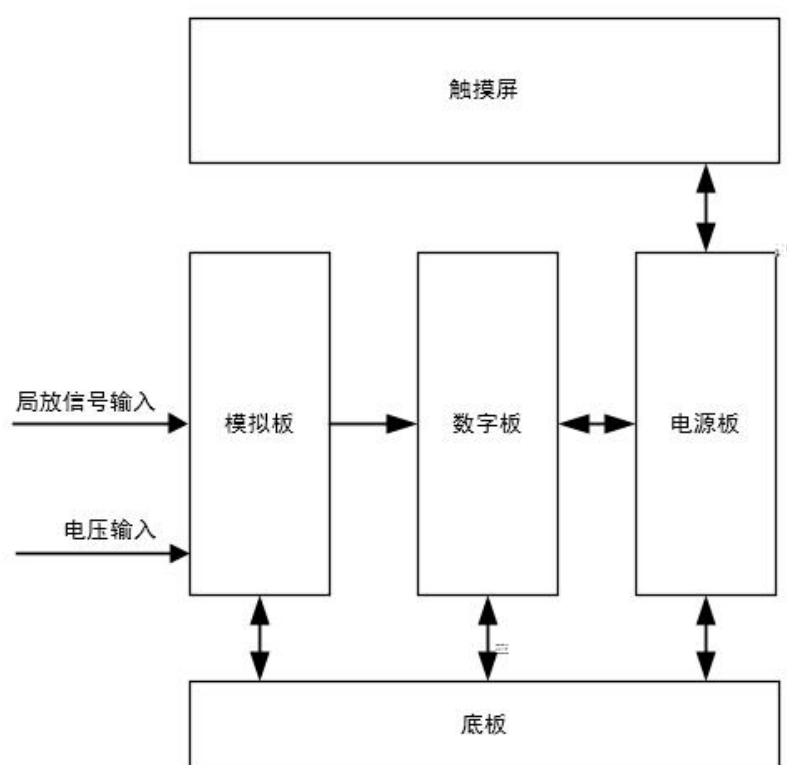

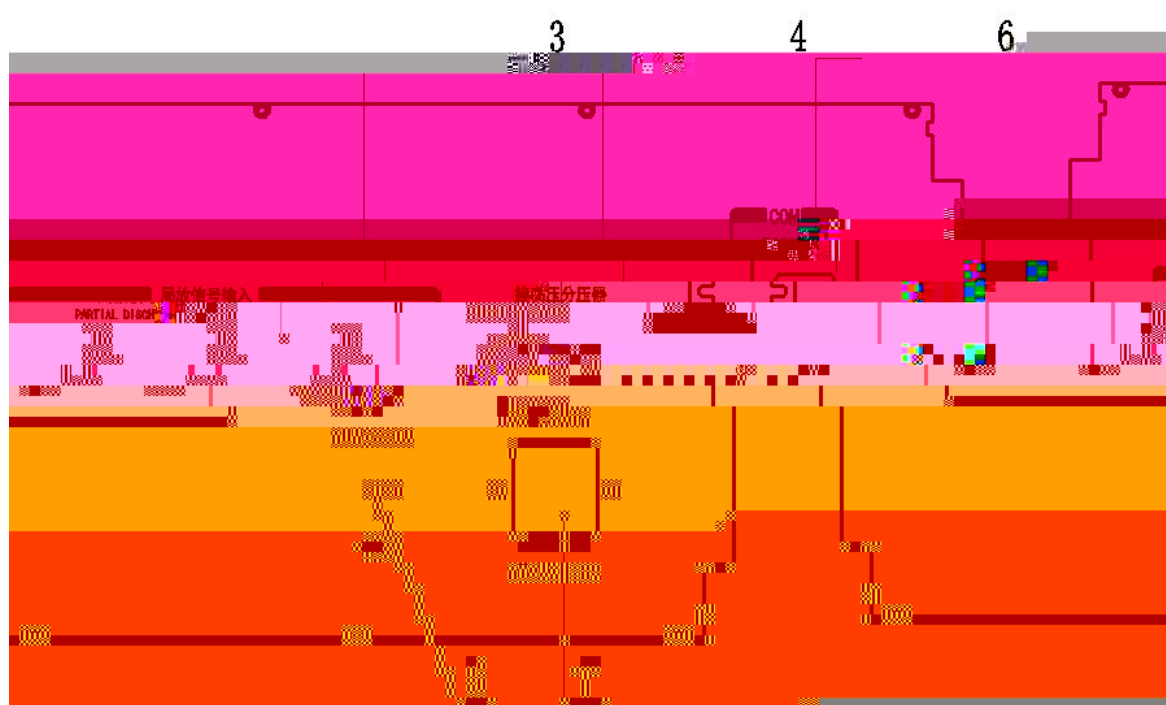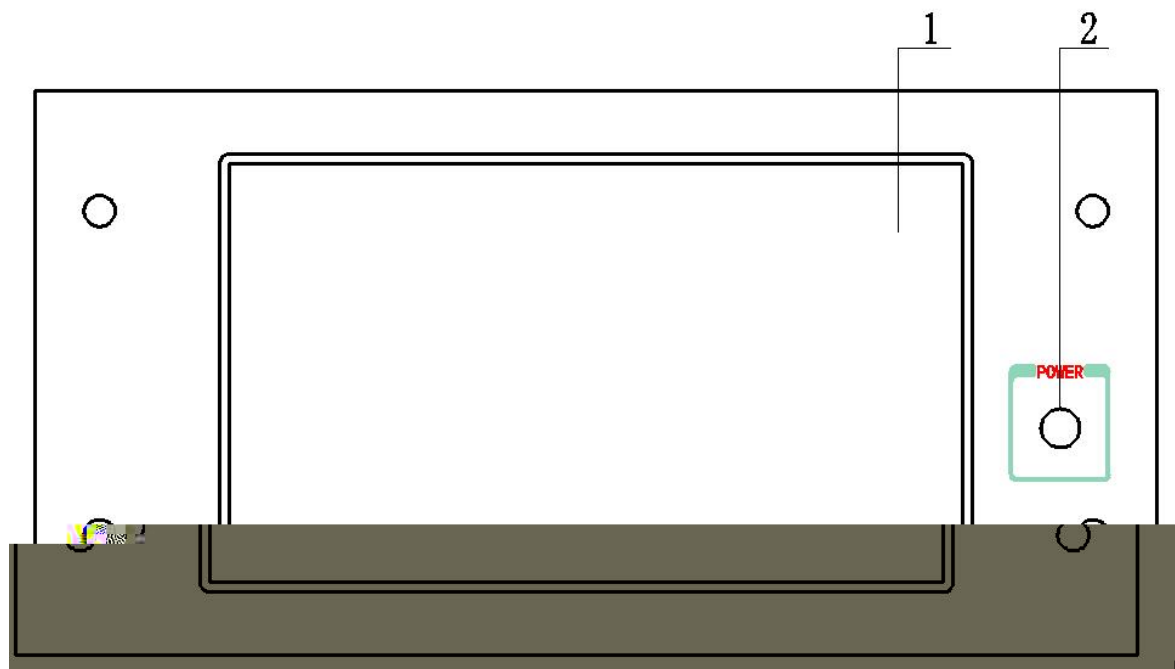

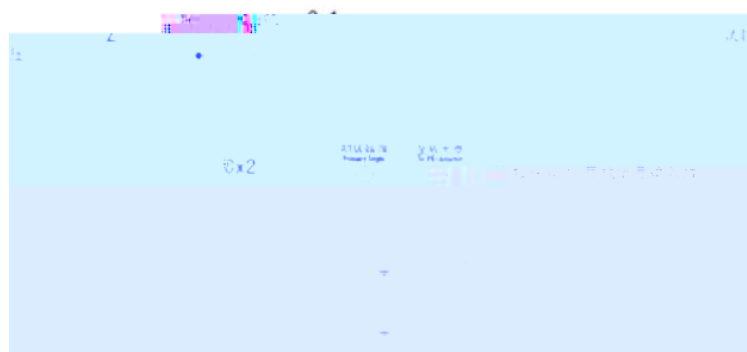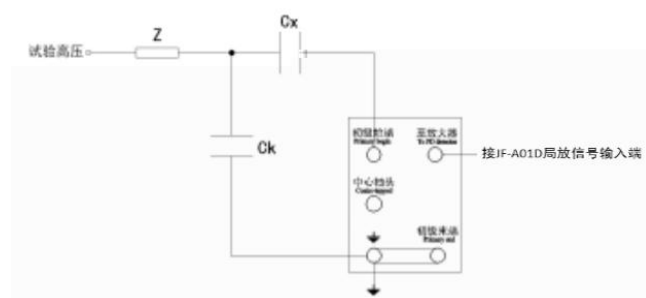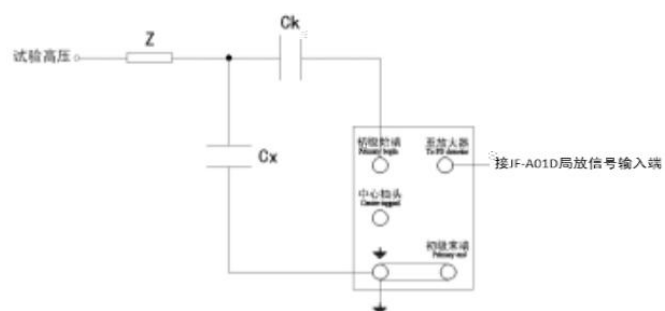

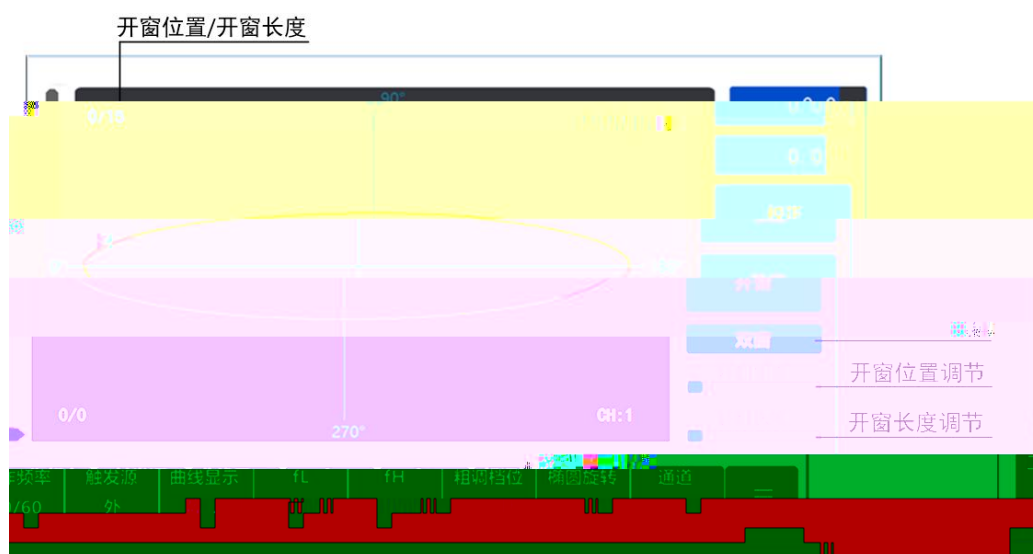

时间校准

时间校准

2020 - 1 - 1 0 : 0 : 0 确认

试验电压校准

试验电压校准

电压值: 0 分压比: 1000 系数: 1000 零标显示

局放校正目标值

局放校正目标值 50 细调值 15 有效期(天) 1

背光设置

背光设置



曲线颜色选择


返回按钮

零标使能选择

细调值

时间码

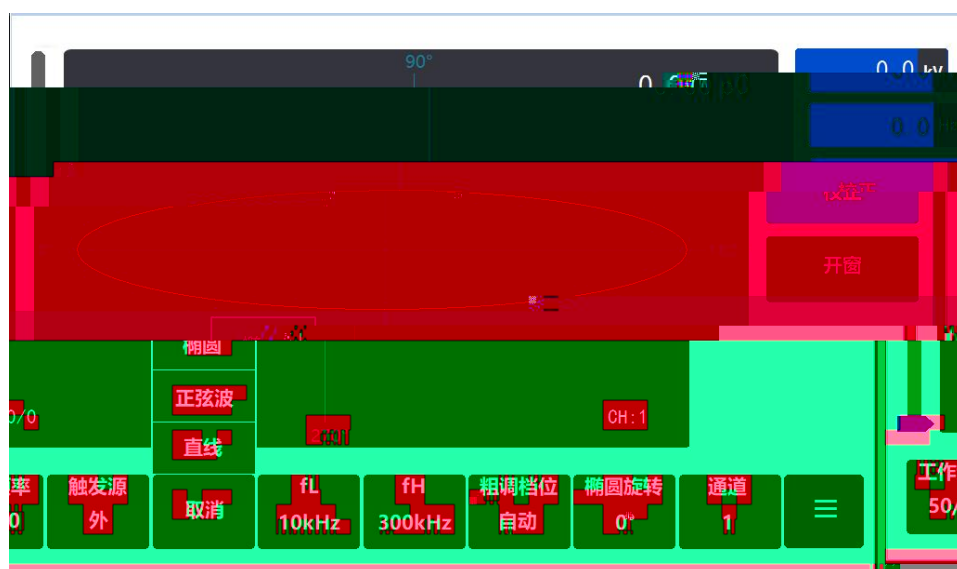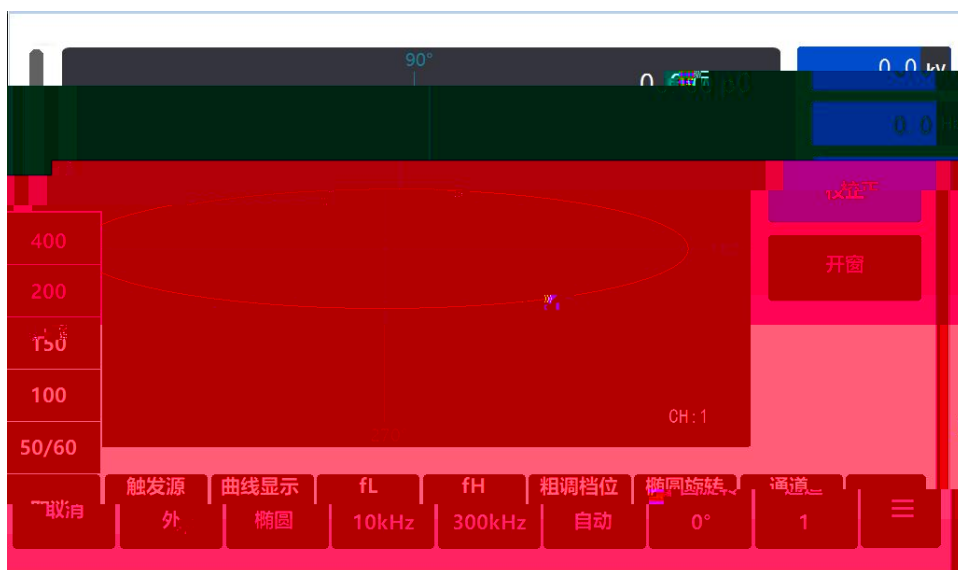

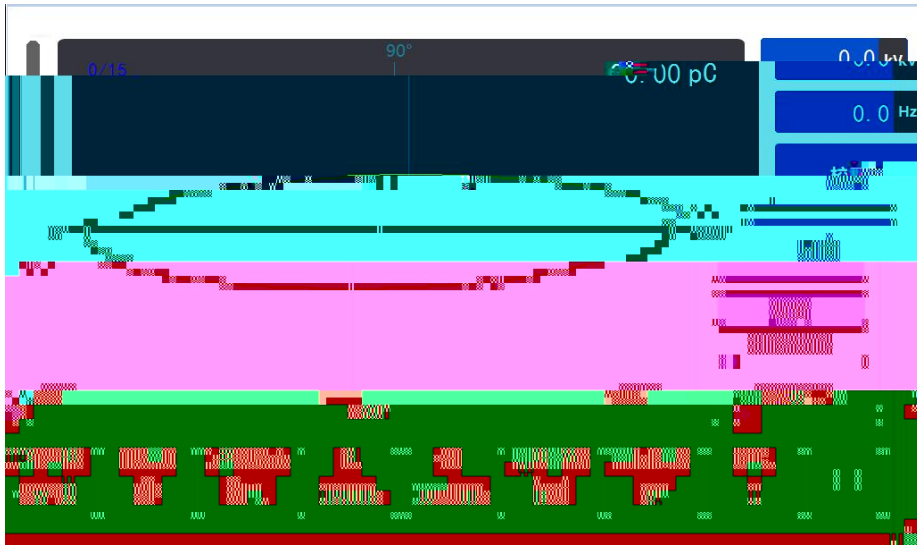

时间校准

2020 - 1 - 1 0 : 0

电压值: 0 分压比: 1000 系数:

局放校正目标值: 50 细调值:




背光待机设置

正常亮度: 70 屏保亮度: 50 屏保时间: 60 秒

返回

(©! 3 <e ^

Q wàpò?ñ Y@Ò!R! ^,³ €ÓŠ`
M¹! ^ :ñA€ñ0 QQ\$WI . ĩ

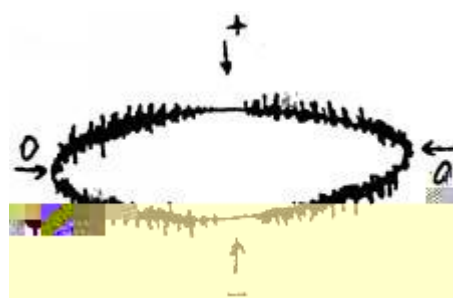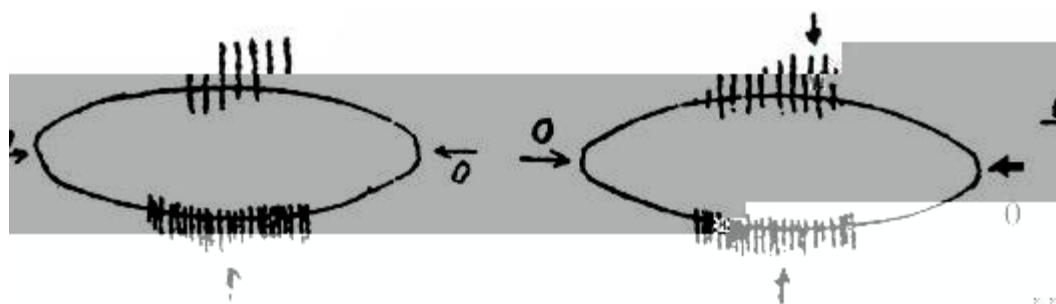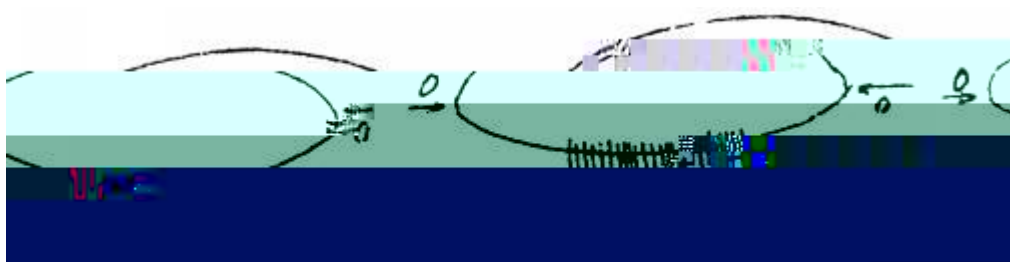

d

r



