

·		4
·		4
·		4
	1	4
·	2	5
·		6
·		7
› ·		

35kV

CT/PT

GB 1207-2006 GB 1208-2006

-
-
-
-
-
-
-
- CT/PT
- 5% 10%
- 3000
- U PC
-

1

CT	PT
•	•
•	•
• 5% 10%	•
•	•
•	•
•	•
•	
•	

2


0.5% 0.3%* +0.2%*

1 220Vac 10% 50Hz

2

3 23 5

4

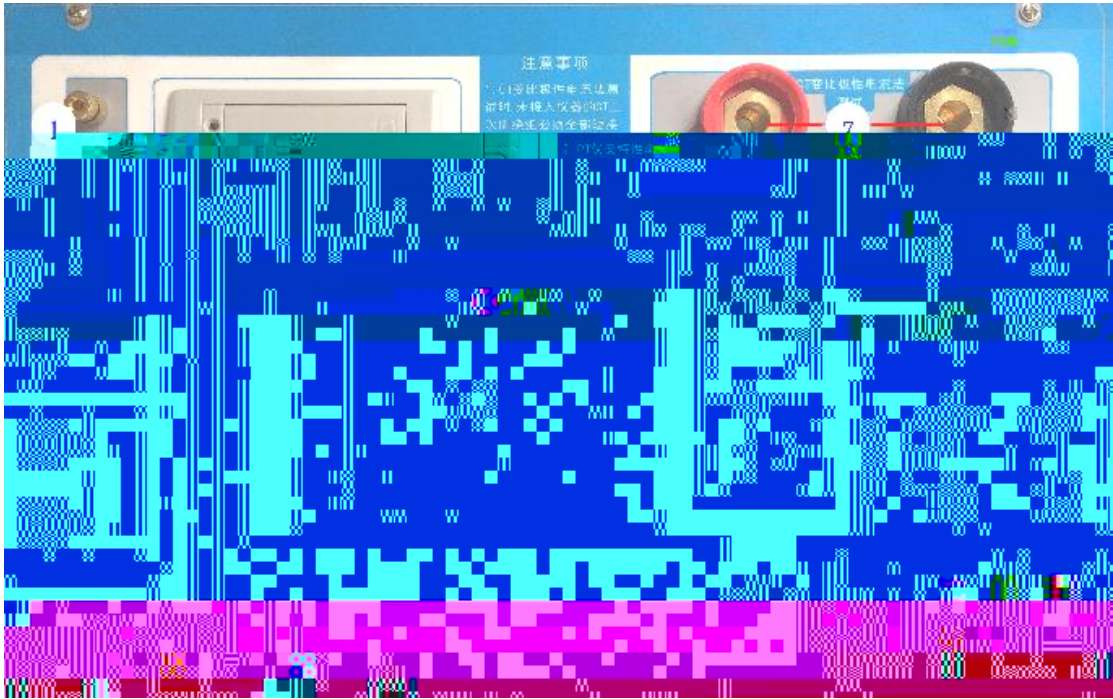

1

1	
2	U
3	
4	
5	
6	
7	CT /
8	CT /
9	CT/PT
10	PT /
11	PT /
12	
13	

2

CT

CT

2

CT

PT

PT

3

PT

3

CT

CT

PT

PT

2

PT

PT

类型	CT	PT
编号	0002	
励磁 变比极性 交流耐压 一次通流 数据查询 退磁		
日期: 2018-08-08		

类型	PT	CT
编号	0002	
励磁 变比极性 交流耐压 数据查询		
日期: 2018-08-08		

■

■

CT



6 CT

7

8

9

6





6

8


9



CT



CT



CT



ALF



5%

5%



10%

10%




类型	CT	PT
编号	0002	2012/01/01
1:	2:	
3:	4:	
		
		

打印

励磁数据

保存

类型	CT	PT
编号	0002	2012/01/01
二次: 5 A		额定
		
		

励磁

变比极性

交流耐压

一次通流

数据查询

1000A



14

CT

K1

1

9

{ 0 \$ a 2 0 u = „ a Q > \$ u • 0 5 7



~~LA VOWRENCO, INC.,~~

<!--~@000j00r0nR0Pv"0xBS

Δ...ΚΑ



K1 K2

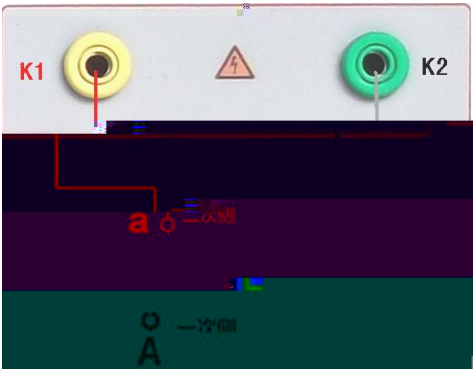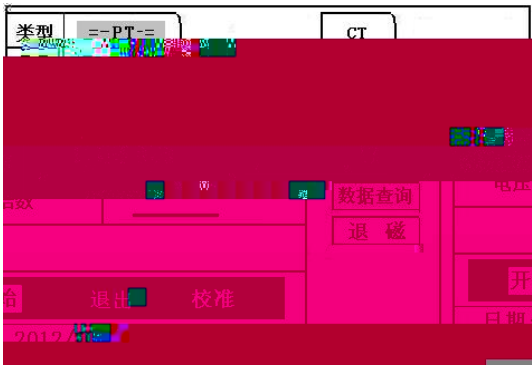


PT

20

100V 100/ 3 100/3 150V 220V

K1 K2

K1 K2

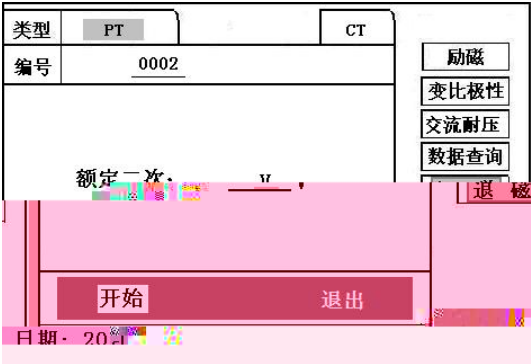


20 PT


K1

1


| | | |
|-------------------------|------|----|
| 类型 | PT | CT |
| 编号 | 0002 | |
| 设定电压 | 1000 | v |
| 实际电压 | v | |
| 开始 返回 | | |
| 日期: 2012/02/10 15:06:15 | | |

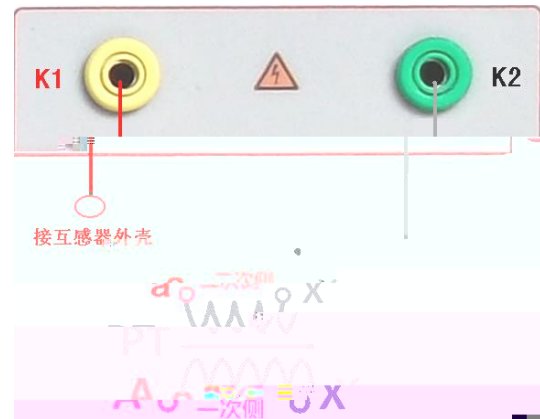


| | | |
|------------------------|------|----|
| 类型 | CT | PT |
| 编号 | 0002 | |
| 励磁 | | |
| 变比极性 | | |
| 退出 | | |
| 日期 2012/02/10 15:06:15 | | |

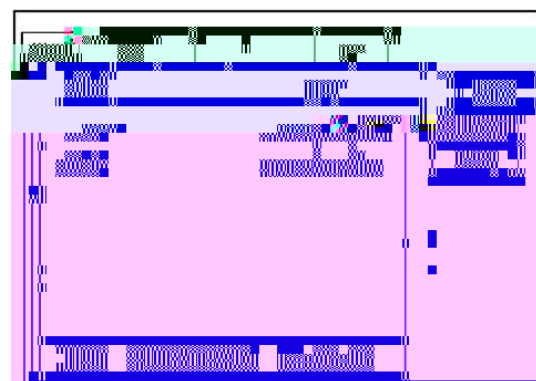


▪

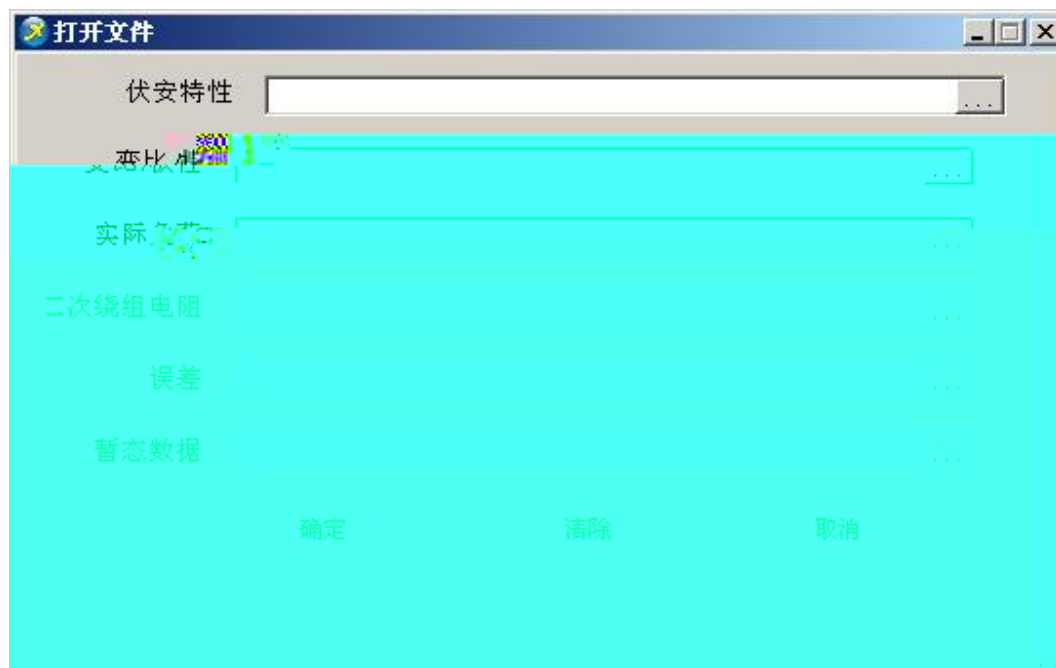




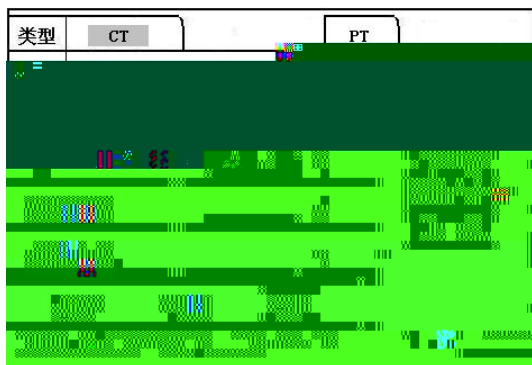

31

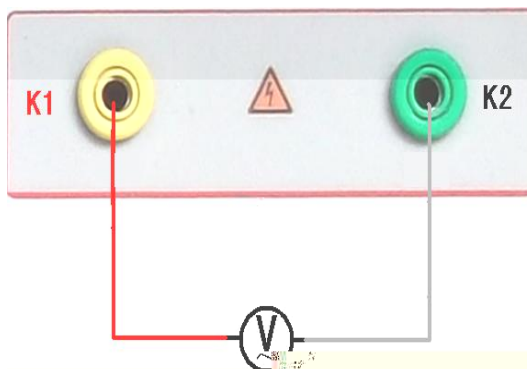

32

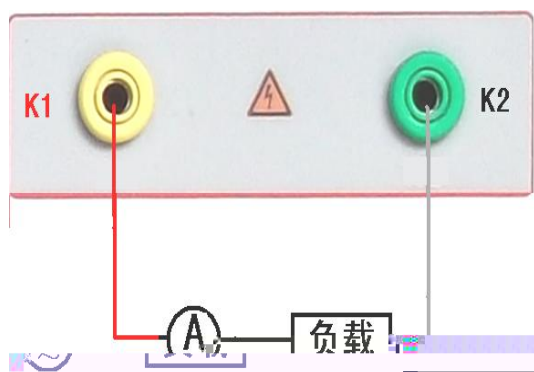

33

CT

31


0.1A

5A;

1V

2500V



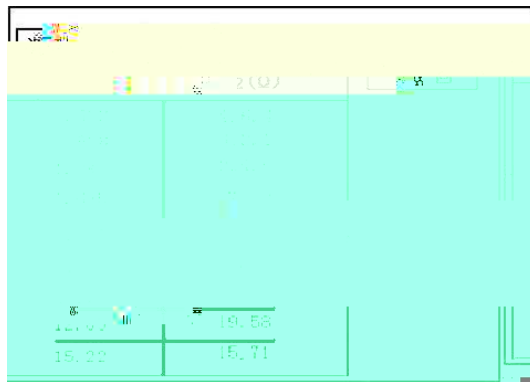

$$M = I \cdot P / N$$

I

N=1 (1A)

N=5 (5A)

P=20 5

P=10 10

$$Z_{II} = U - I \cdot Z_2 / (K \cdot I)$$

U

I

Z₂ CT

K=19 5 .1A 5A

K=9 10 .1A 5A

3

35


99

01

99

01

36

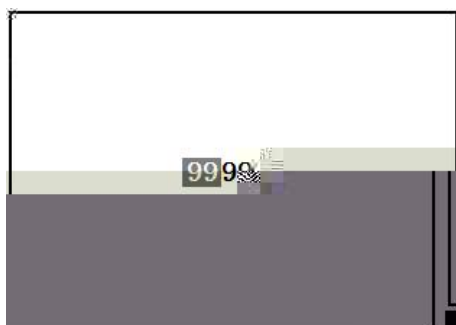

35



36

