



—

博覧強記

四書五經

1.1


1.4

1.

2.

1.5

60/ 60/ 6/
2 3

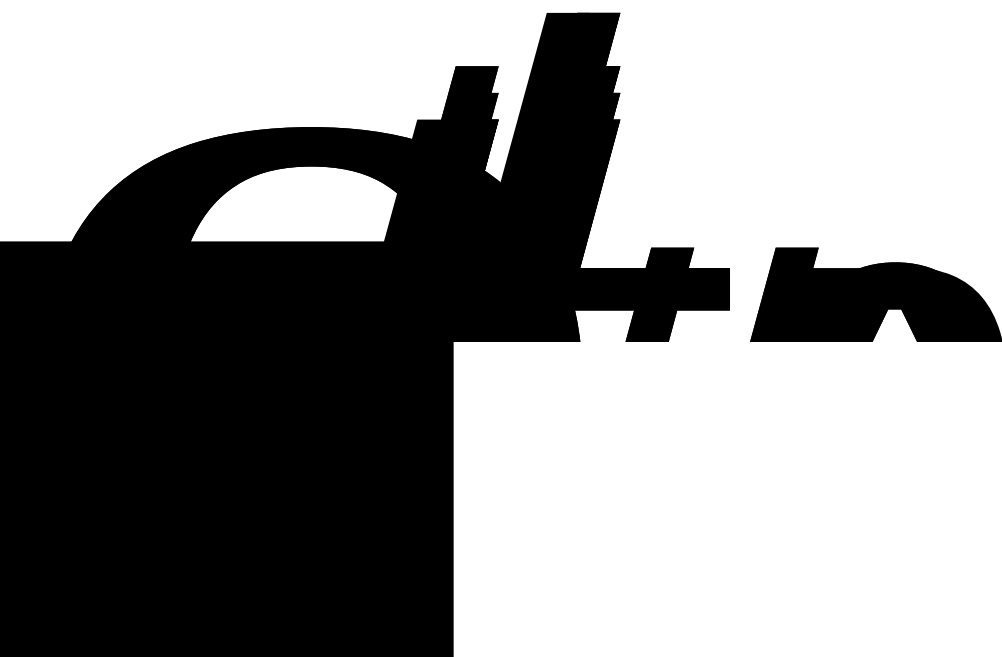

3.

4.

kV

1.1

5.

6.

(220V

± 10)

7.

8.

9.

10.

5%

11.0.75

0.75U_{DC1mA}



0.75

0. J_{DC1mA}

AdA

6.

2.3

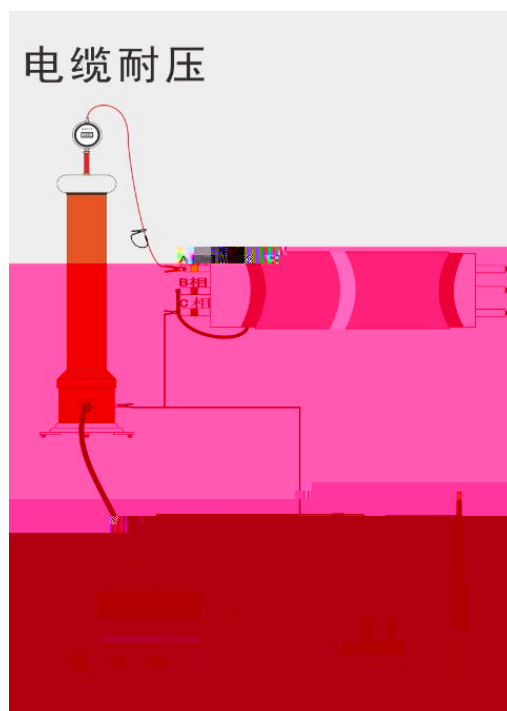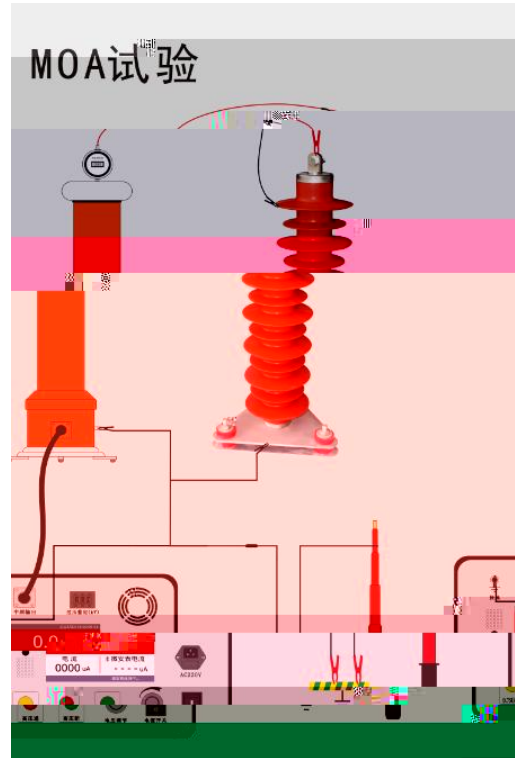

3.1

1.

2.

220V

3.

1.1

4.


3-1

3-2


“ ”

3-3


3-4

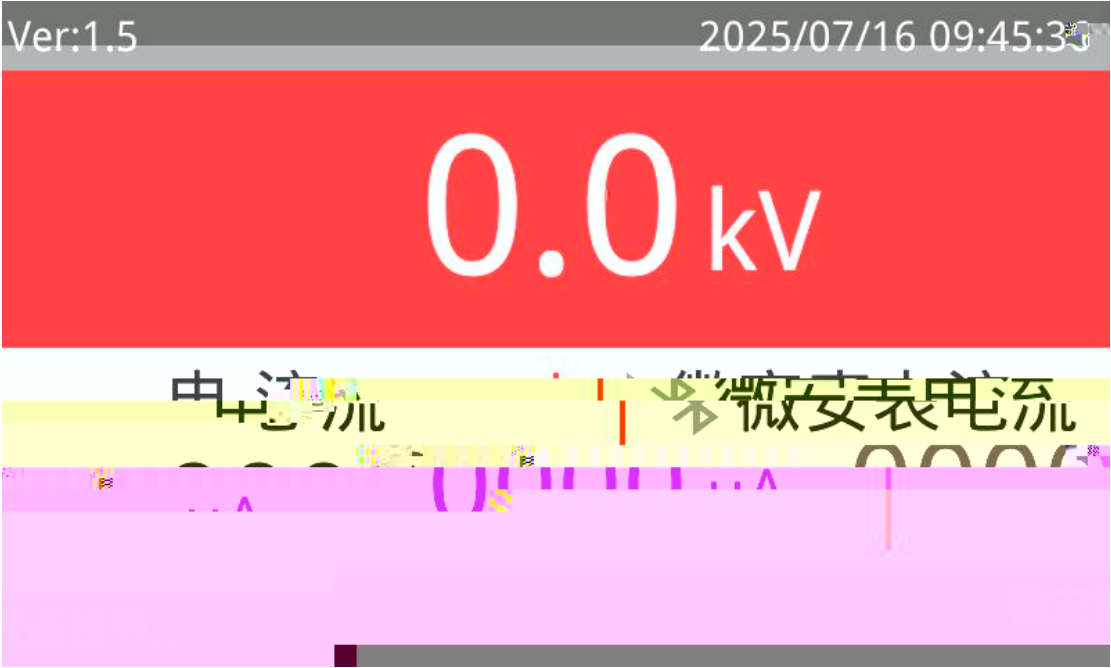

3-1

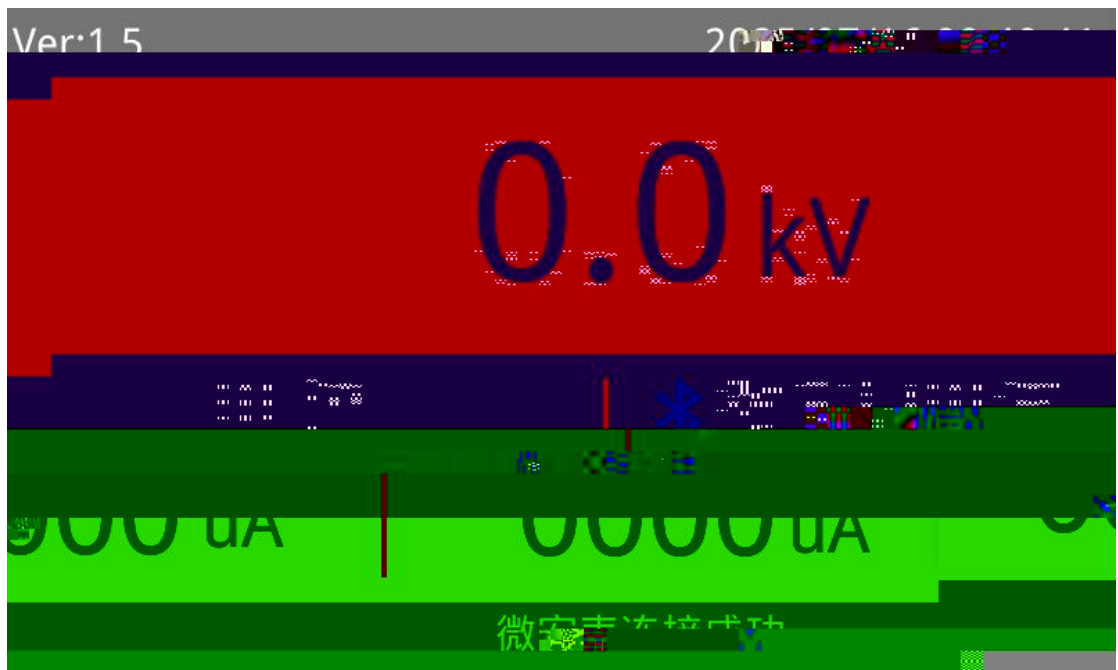

3-2

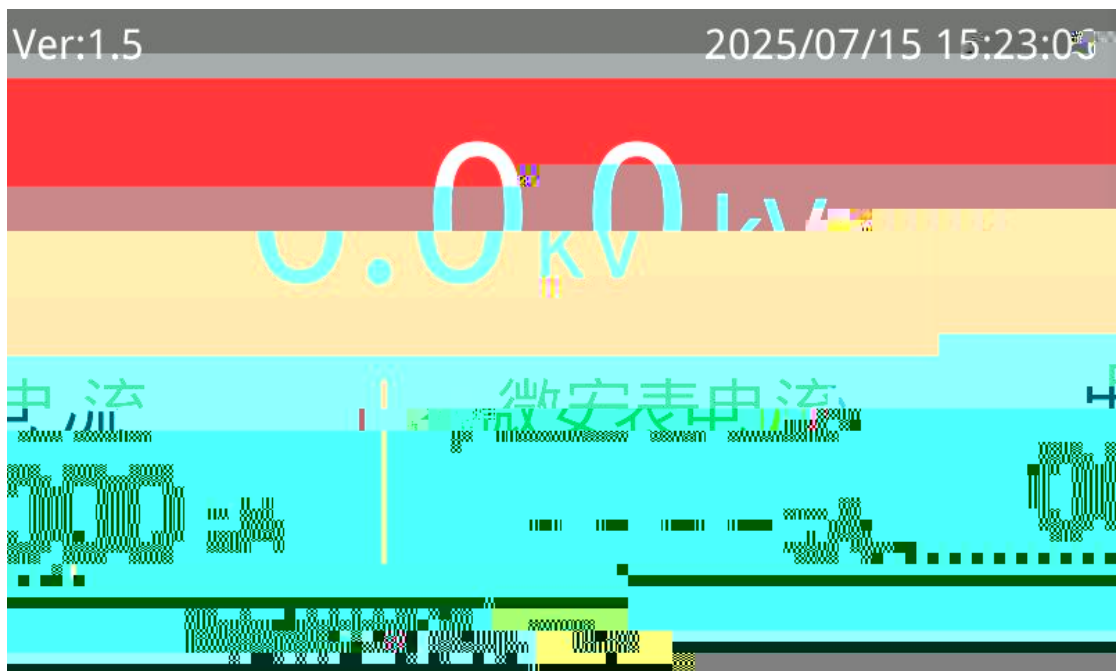

3-3



3-4

5.

6.

0.75

7.

8.

5-15kV

。


m

3.2

- 1.
- 2.
- 3.
- 4.

LED

3-5

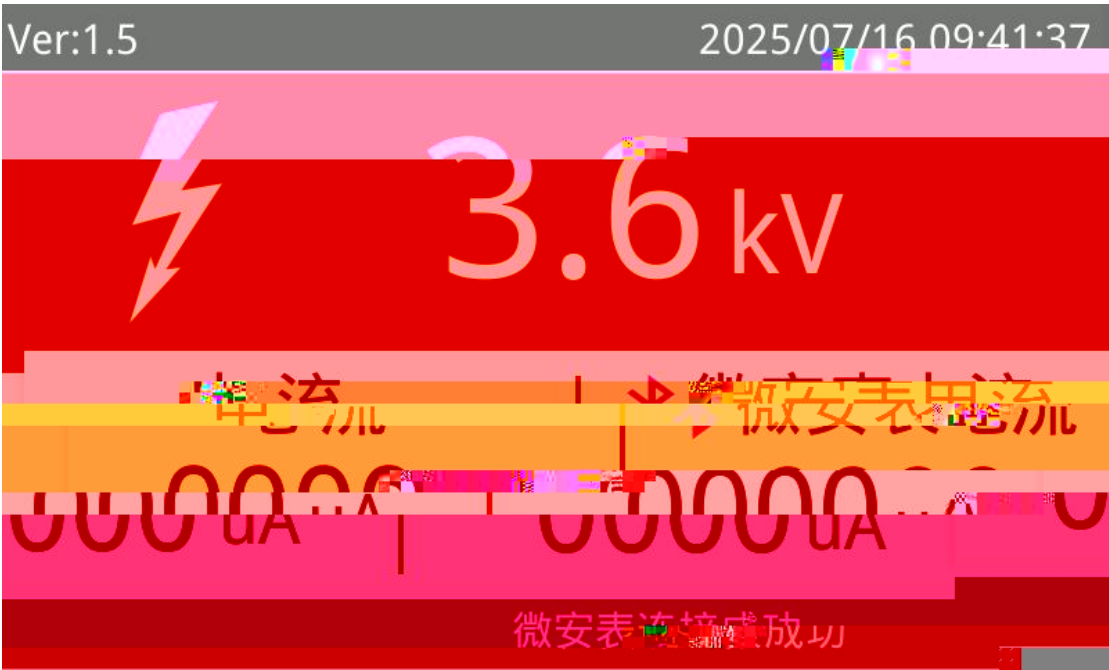

3-5

- 5.
- 6.

3.3



3-8



3-9

3.4

1. 3.2

2.

() 95

()

()

3.

4.

3.5

1.


I_2

$I_1,$

$$I_0=I_1-I_2$$

2.


6

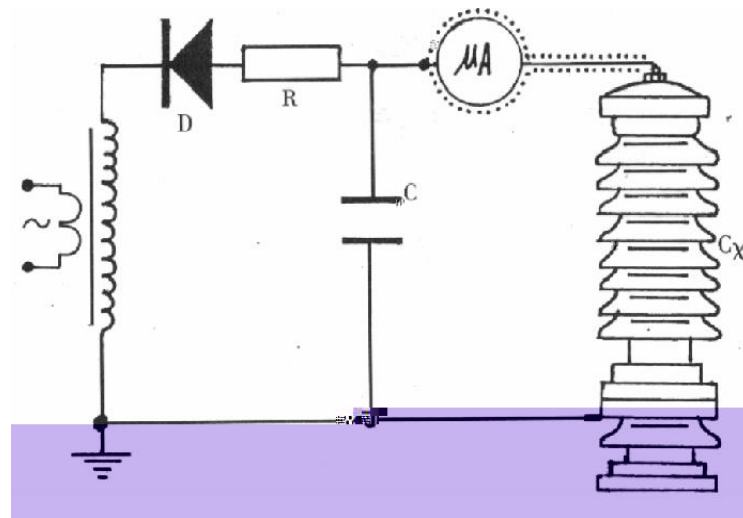

6

CX



7

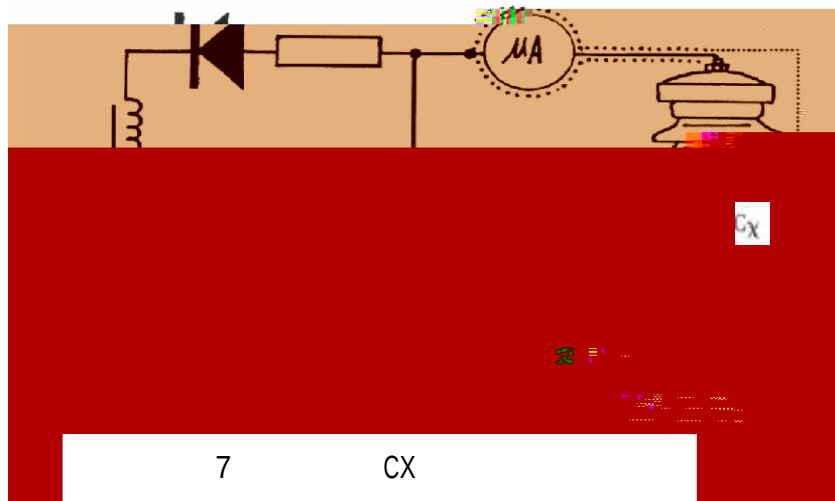

7

CX

3.

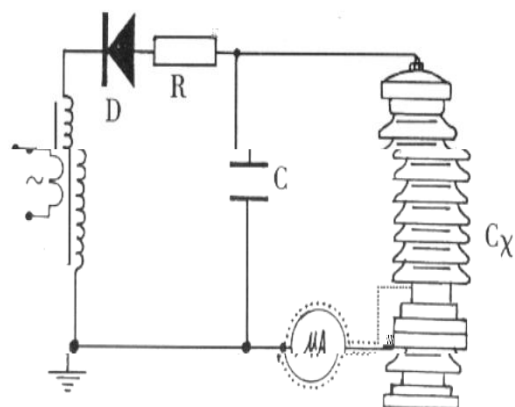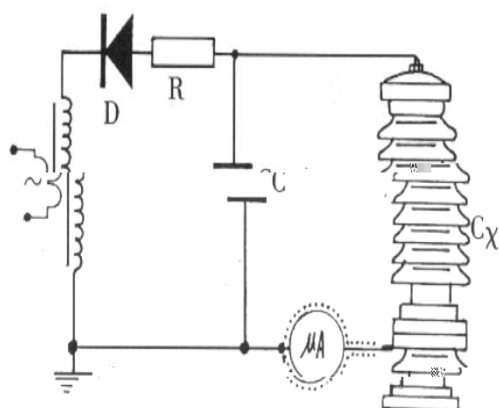

2. 排除试品 C_X 表面影响接线图

3.6

1.

2.


3.






“

”

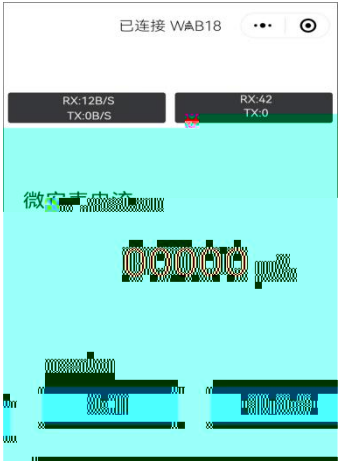

/j B 0x17Ea

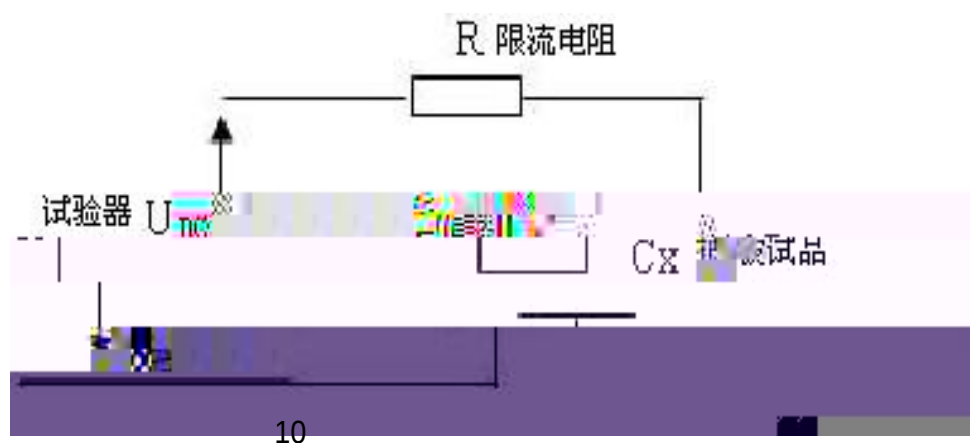

U

1.

2.

5-15kV

5-15kV

“ ”

3.

4.

1			
2			
3			
4			
5	“ LB ”		
6	0		


1		1	
2		1	
3		1	
4		1	
5	(1M Ω)	1	
6		1	
7		1	
8		1	
9		1	
10		5	
11		1	
12		1	
13		1	



1.




2.

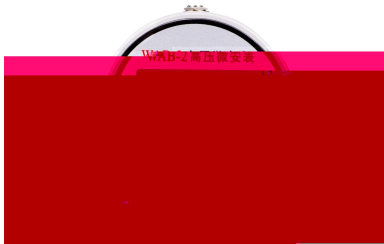

3.



4.




5.



6.



7.

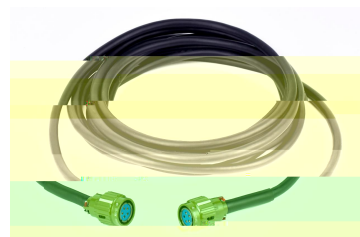

9.



10.